

DCM2

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

EFFECTIVE NETWORK COMMUNICATION

THE DCM DIAGNOSTIC COMMUNICATION MASTER IS THE IDEAL SOLUTION FOR THE CONTROL OF ACTUATORS FROM A REMOTE CONTROL ROOM.

It acts as an interface between the upper level of the control system and the field devices connected by a fieldbus network providing advanced centralized control and monitoring of up to 300 actuators through a multi-protocol network able to manage optic fibers, wireless and copper wired connections concurrently.

The DCM2 combines Biffi's extensive experience in actuation technology with the flexibility and operative reliability of the LonWorks open and standard bus communication protocol. It also employs a wide range of different wired and wireless protocols to drive each loop connection.

FLEXIBLE AND INNOVATIVE

The DCM2 can be integrated or retrofitted to any devices to provide advanced maintenance data and effective communication. Based on a modular architecture, it features two Modbus TCP/IP lines and two Modbus RTU lines. An innovative group management capability simplifies complex networks and four layer password protected access ensures network security.

EFFICIENT AND RELIABLE

The DCM2 is a high efficient communications tool. It is equipped with a powerful graphic interface, which allows the local operator to have full control of the plant even though the other interfaces (DCS, configuration terminal or local supervisor) are not active. It supplies specific screens for the management of each individual device, enabling the operator to implement maintenance functions without enlarging the system architecture.



TECHNICAL SPECIFICATIONS

HOST CONNECTIONS

Two independent
MODBUS TCP/IP lines

Two independent MODBUS RTU
RS232C or RS485

All lines are equipped with a
monitor port for easy diagnostic
services

FIELDBUS COMMUNICATION

Scalable architecture from simple
bus line to multi-loop structures

Open architecture to support
multiple fieldbus protocols


REMOTE ACCESS FOR SERVICE

GPRS data line connection to
support remote service operation

FULL GRAPHICAL OPERATOR INTERFACE

Intuitive and easy to use 10" touch
screen operator Interface

Full range of languages supported
for contextual help screens

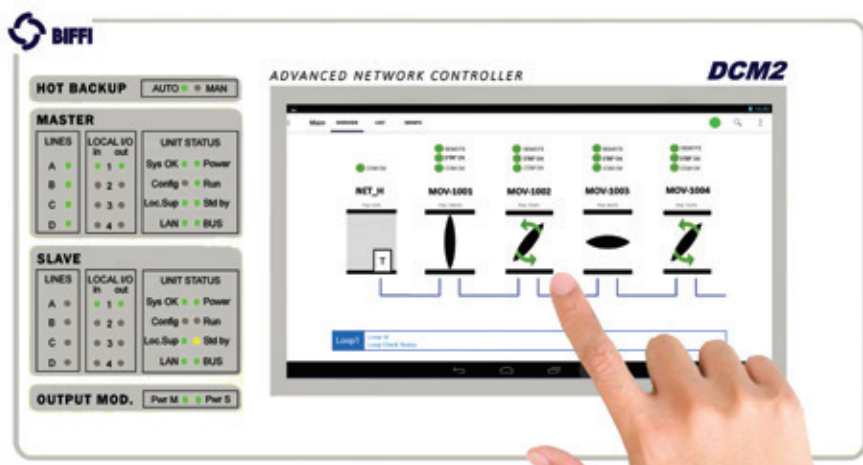

ADVANCED DESIGN PROVIDES MAJOR BENEFITS

USER-FRIENDLY GRAPHIC INTERFACE

The full color 10" TFT touch screen display makes using DCM2 easy and fast. All the fieldbus can be checked by in a single view and the status of every loop and actuator can be monitored simply by touching its icon on the screen.

HIGH CONNECTIVITY

A wide range of connection options is available. Wireless, optic fibers and copper wires can support different protocols concurrently both to the field and DCS. The wealth of different network configurations available and the supported protocols are detailed in the following pages.

RELOCATABLE INTERFACE

Where space saving is a key factor, DCM2 gives you the option to remove the operator interface from the chassis and move it to a more convenient location. Both wireless and wired connections are available. The powerful electronic design enables you to mirror the interface (full control) to a remote PC located anywhere, through a TCP/IP network.

REMOTE SUPPORT OPTION

DCM2 can be equipped with an optional GPRS module for data transfer to the Biffi support team. This enables every connection to be opened and closed easily and allows read, write or read & write data transfer within a secure environment. It enables you to obtain instant support and allows Biffi's technical experts to read remotely the status of the field, the quality of communications and all the other necessary information to make any maintenance operation fast and effective.



EASY DIAGNOSTICS

The DCM2 user interface has been designed in conjunction with end users, drawing on all their experience in the field. All communications, commands and settings have been designed to be intuitive and clear. The GUI (Graphic User Interface) is the result of extensive development and is believed to be the best interface ever designed for a control station.

Dynamic icons, differentiated through color and geometry, give the operator an immediate and clear picture of every actuator's status in the field. Simply touching each icon enables you to swap into a diagnostic menu where every parameter is reported and compared with a standard value. In addition, a graphic view has been designed to give the operator instant information about every anomaly.

A complete 'help on line' facility has been embedded into the interface firmware to provide constant and clear information, enabling the meaning of options and messages to be explained instantly.

DCMi: ADVANCED FIELD COMMUNICATION

Biffi actuators are updated continuously and represent the most advanced technology available. Main boards are equipped with powerful CPUs and reliable sensors able to detect the status of the actuator, torque and speed curves, its backlog and predict its future behavior. All this information can be read using an optional device, called the DCMi. It is based on specifically developed software that will run on a fan-less PC connected to DCM2 and is able to communicate with every actuator in the field, collecting data from every sensor they contain.

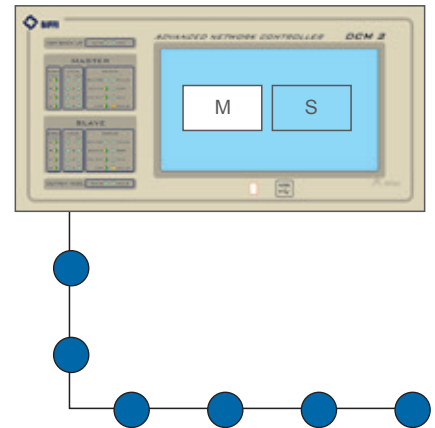


DIAGRAM A

WORKING PRINCIPLE AND FIELD NETWORK CONFIGURATIONS

DCM2 is a modular device that can be tailored to meet specific needs, including many different network solutions. Starting from the simplest scheme with no redundancy, DCM2 is able to drive many different configurations, as follows:

A. SINGLE STATION WITH A NON-REDUNDANT BUS

Easy, fast and inexpensive, this configuration enables every actuator to be driven and maintains full communication with the field.

B. SINGLE STATION WITH REDUNDANT BUS

If a bus is interrupted, DCM2 sends alert signals and network alarm messages, while communication remains intact. Up to 6 loops can be connected to one DCM2, each of which can drive up to 120 actuators virtually.

C. MASTER AND SLAVE DCM2 STATION IN HOT BACKUP WITH A REDUNDANT BUS

This offers double redundancy, both for the bus cable in the field and for the DCM2, which is able to switch between master and slave during operation without interrupting communication. It is also possible to perform an easy and fast 'hot replacement' of the CPU units during operation.

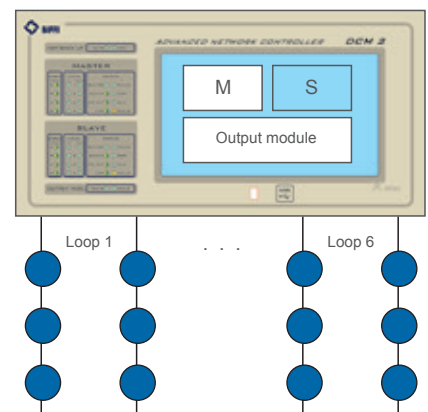


DIAGRAM B

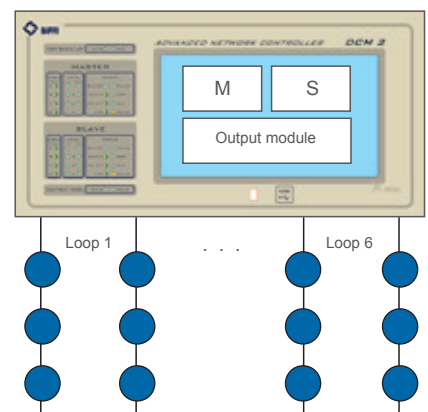


DIAGRAM C

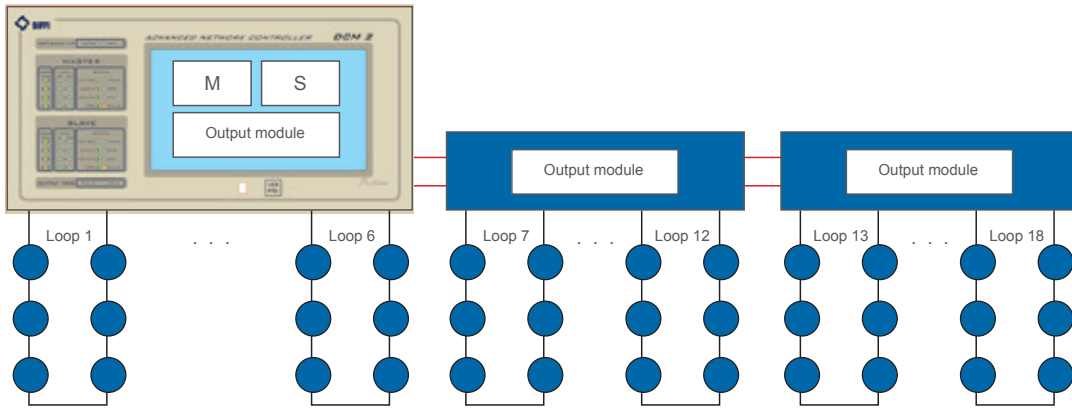


DIAGRAM D

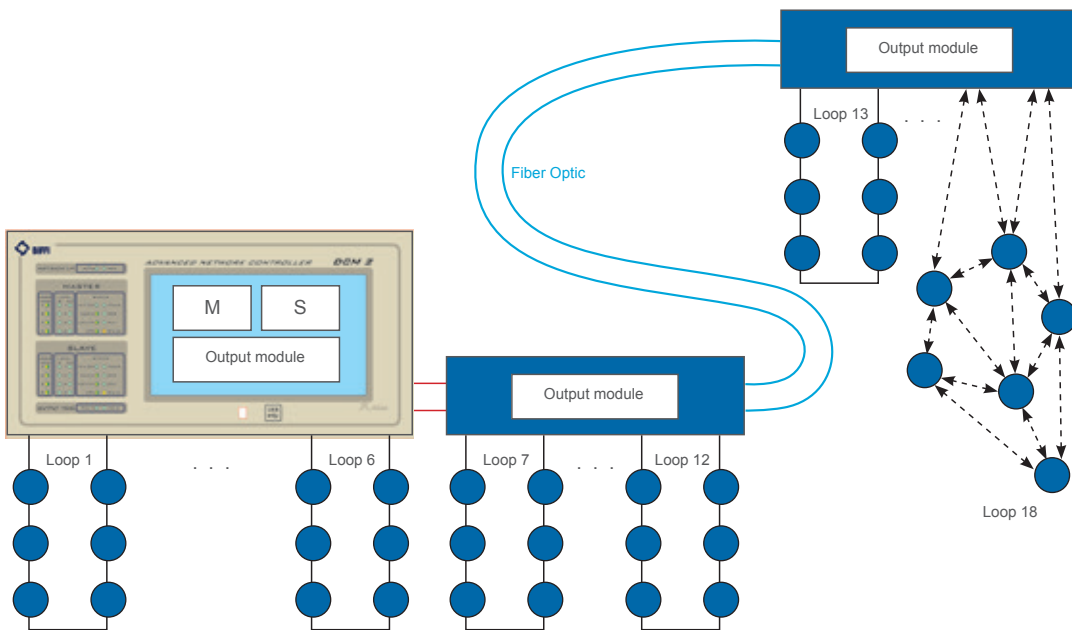


DIAGRAM E

D. MASTER AND SLAVE DCM2 STATION IN HOT BACKUP WITH ADDITIONAL OUTPUT MODULES

Up to 18 redundant loops with a maximum of 300 actuators in total can be driven with this configuration. A signal repeater is required for every 60 actuators or every 1400 meters.

E. MASTER AND SLAVE DCM2 STATION IN HOT BACKUP AND (RIGHT) OUTPUT MODULES CONNECTED BY OPTIC FIBER LINE AND WIRELESS LOOP

The fiber optic module enables the DCM2 to drive loops as far away as ten kilometers. At this distance, wireless communications between the actuators and the output module can also be established using radio devices.



DCM2

TECHNICAL SPECIFICATION

MAINS SUPPLY

Double redundant 24 V DC-35 W each

INTERNAL SUPPLY PROTECTION

Resettable fuse (MultiFuse protector)

BATTERY

3 V Lithium battery type CR2032

Data retention: 8 years

IMPORTANT: The batteries have to be replaced when the relevant indication is shown in the screen system. This must be carried out while the DCM is powered

FIELD BUS PROTOCOL

Protocol LONWORKS

Transmission media:

Twisted pair @78 Kbps

Twisted pair @1.25 Mbps

Wireless @2.4 GHz/5 GHz

Protocol MODBUS RTU RS485

Transmission media:

Copper Twisted Pair

LOCAL DI

4 opto-isolated inputs:

Min input isolation: 500 V DC

Min voltage input high: 4.75 V DC

Max voltage input low: 0.2 V DC

Max input voltage: 36 V DC

LOCAL DO

4 volt-free contacts, normally open

Nominal resistive load:

0.5 A @110 V AC; 1 A @24 V DC

Max working voltage:

125 V AC, 60 V DC

Output isolation: 400 V DC

LOCAL DISPLAY

10" touch screen

LOCAL KEYBOARD

Integrated in local display

LEDS

MASTER and SLAVE unit:

4 green LEDS -
status of available inputs

4 green LEDS -
status of outputs

4 green/yellow LEDS -
status of serial lines

8 various LEDS -
status of the DCM

Integrated HOT BACKUP unit:

2 green and yellow LEDS -
current status

Integrated OUTPUT MODULE unit:

2 green and yellow LEDS -
current status

DIMENSIONS

Length - 480 mm, width - 230 mm,
height - 223 mm

WEIGHT

5 kg

HOUSING

19"- 5HE rack, suitable for cabinet
mounting

WORKING TEMPERATURE

0°C to +50°C

STORAGE TEMPERATURE

-10°C to +70°C

HUMIDITY

5% to 95% RH, non-condensing

EMC

IEC/CISPR 22 Class A IEC/EN55022;
IEC61000-6-2; IEC61000-6-4

CE MARK

YES

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93